



From MSI









From MSI




PAVER SIZES AVAILABLE (ALL 2CM THICK)

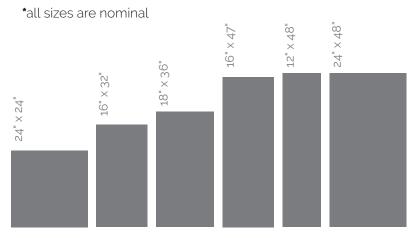



COPINGS

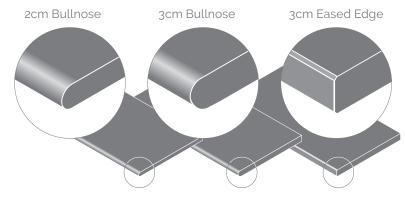

13" x 24" Copings with bullnose on one long edge


SPACERS







4 joint spacers used for stacked pattern.






Create a 3 joint spacer by snapping a piece off the 4 joint spacer for use on a brick pattern.

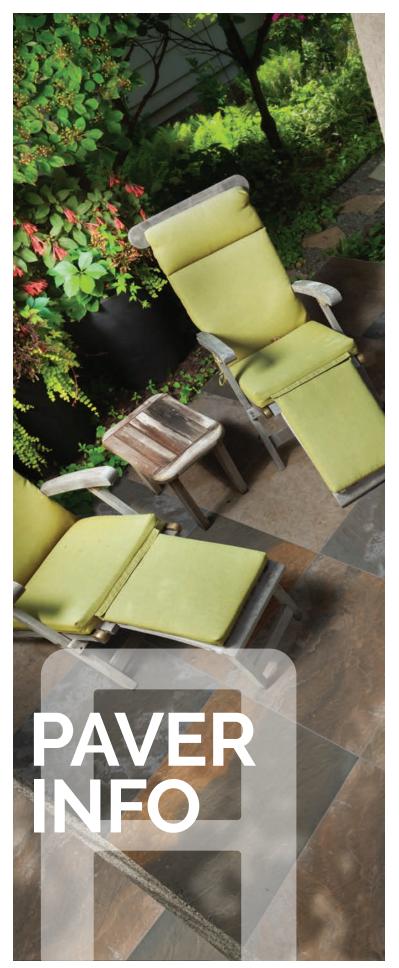

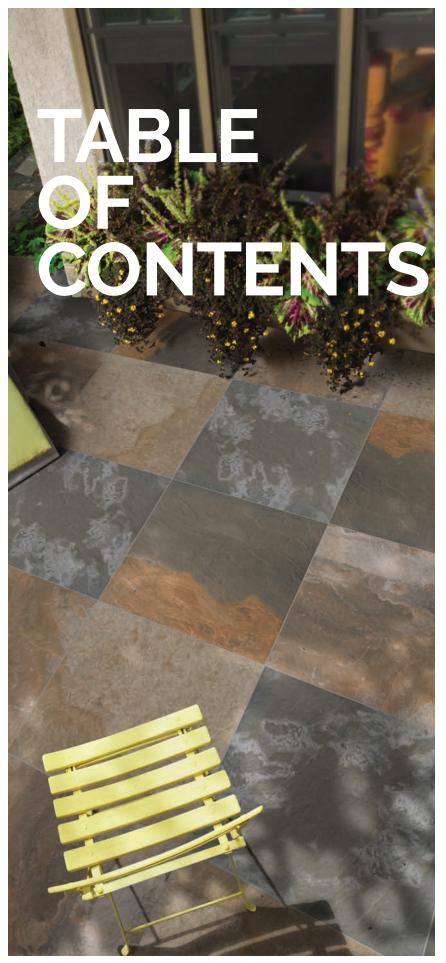

FAQ	6
Sand Set Installation Instructions	10
Mortar Set Installation Instructions	12
Additional Setting Styles	12
Argento Travertino	14
Beton Antracite	16
Beton Blanco	18
Beton Grey	20
Beton Sand	22
Caldera Blanca	24
Caldera Coala	26
Caldera Grigia	28
Concerto Grigio	30
Fossil Snow Pattern	32
Golden White	34
Living Style Beige	36
Living Style Cream	38
Living Style Pearl	40
Lucas Betulla	42
Lucas Canitia	44
Mystique Multicolor	46
Palmwood Gris	48
Palmwood Walnut	50
Pedra Azul	52
Petra Beige	54
Praia Carrara	56
Praia Crema	58
Praia Grey	60
Quarzo Gray	62
Terrazo Glacier	64
Terrazo Gris	66
Tierra Beige	68
Tierra Ivory	70
True Bluestone	72
Vulkon Grey	74
Vulkon Nero	76

Our new Arterra Porcelain Pavers provide low maintenance without giving up on the natural stone look. High definition glazed ink jet pavers offer all of the features of natural stone pavers, with the added benefits of porcelain. With all of the same characteristics and installation techniques of natural stone, these Arterra Porcelain Pavers can also withstand freeze-thaw cycles. They can be set on grass, sand set or installed with mortar over a concrete bed.

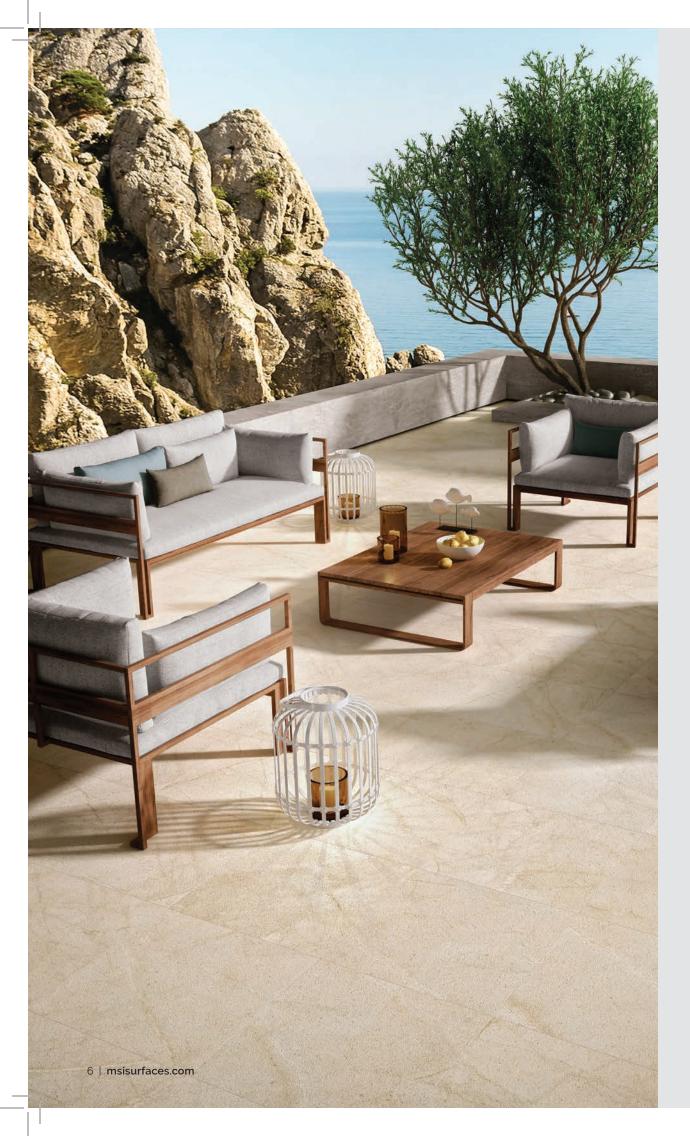



WA Lifetir



LOV Easy t press



STA
Becau
absor
a high



STFSuper



SLIIThe s
a high



HIG The g 1200° is resi



The g ensur even



FRE MSI P imper don't makir

WARRANTY

ifetime Limited Residential Warranty

OW MAINTENANCE

asy to clean with a water hose or ressure washer

TAIN RESISTANT

ecause of its extremely low moisture bsorption, MSI Porcelain Pavers have high resistance to stains.

TRONG

uperior strength and impact resistance.

SLIP RESISTANT

he surface texture is designed to have high slip resistance, even when wet.

HIGH WEAR RATING

he glazed surface is fired at 200° F, ensuring a hard surface that resistant to wear

JV RESISTANT

he glazed surface is baked on, nsuring the color will remain intact ven after years of being in the sun.

REEZE THAW RESISTANT

1SI Porcelain Pavers are virtually npervious to water and the properties on't change with temperature, thereby naking the pavers freeze thaw resistant.



Q. Most natural stone pavers are at least 3cm (1.25") thick. But porcelain pavers are only 2cm (0.75"thick). So are they strong enough?

A. Porcelain pavers are extremely strong even at only 3/4" thick. All MSI porcelain pavers have very good impact resistance and with proper surface preparation, can be used in pedestrian walkways (sand set) or vehicular traffic (mortar set)

Q. Do porcelain pavers get hotter than natural stone or concrete pavers?

A. Our testing indicates that porcelain pavers do not get significantly hotter than a comparable color natural stone paver. And generally are cooler to the touch than concrete pavers. Surface temperature of pavers is largely a function of color, not material. In our testing in the middle of a hot day, porcelain paver surface temperatures were comparable to natural stone pavers. Dark colored natural stone pavers had higher surface temperatures than light colored porcelain pavers.

Q. How are porcelain pavers installed?

A. Arterra premium porcelain pavers are installed in much the same way as natural stone pavers. They can be sand set or mortar set. See the Arterra Premium Porcelain Paver Installation Guide for specific requirements.

Q. How do you cut porcelain pavers?

A. Use a porcelain diamond blade in a wet saw that is large enough to cut the 24" paver. Ensure the blade is sharpened and push the paver slowly to minimize the risk of chipping.

Q. Can Arterra porcelain pavers be installed on a driveway?


A. Yes. Porcelain Pavers must be mortar set if installed on a driveway. See the Arterra Premium Porcelain Installation Guide for specific requirements.


Q. Can Arterra Premium Porcelain Pavers be installed on pedestals?

A. Yes. See the pedestal manufacturer's installation instructions for specific requirements.


Q. Are Arterra pavers slippery around pools?

A. All Arterra porcelain pavers exceed industry standards Dynamic Coefficient & Friction. The surface texture has been designed to have a high slip resistance, even when wet.

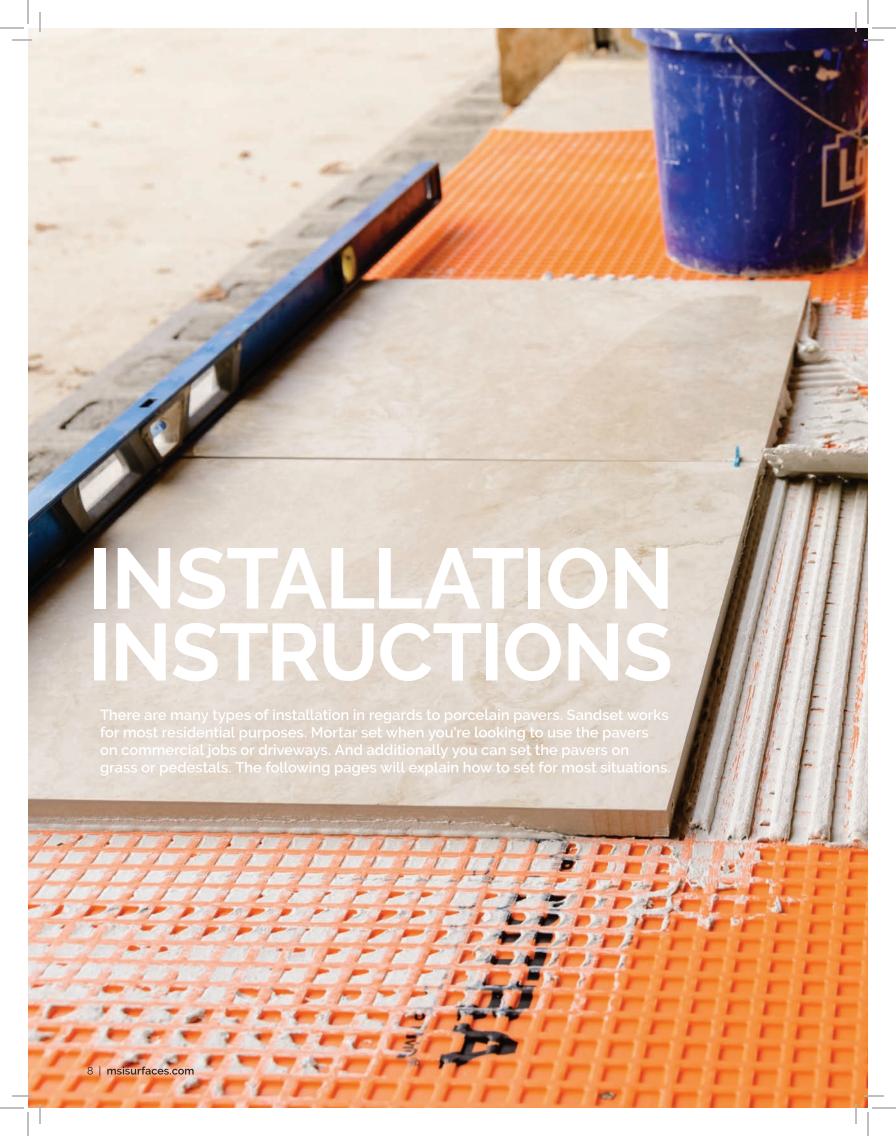

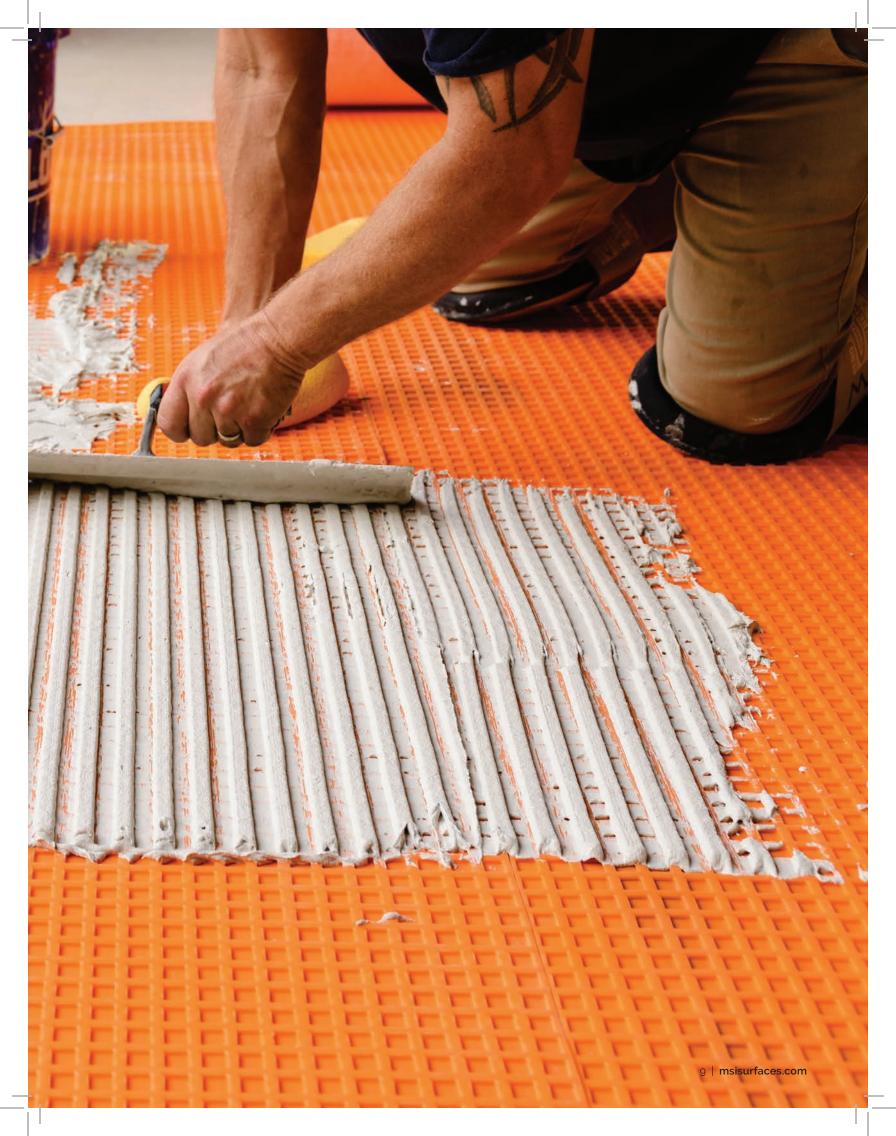

SANDSET

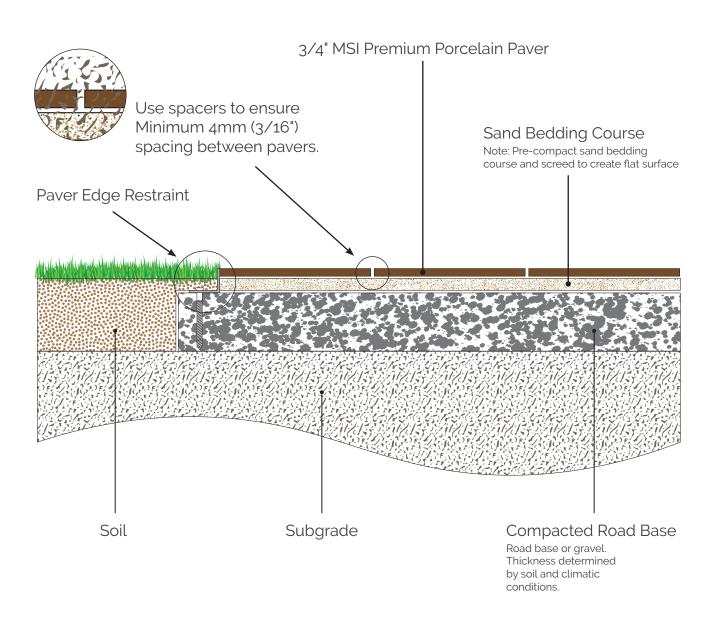

- · To avoid chipping the porcelain paver, only use a tile saw that has a wet cut porcelain blade.
- · Spacers are necessary when installing porcelain pavers.
- CAUTION: Do not compact the porcelain pavers with a plate compactor.


STEP X STEP

INSTALLATION



- 1 Excavate the site, removing enough dirt to allow for the road base, sand, and paver. Compact the soil ensuring a slope away from buildings and foundations. Lay a geotextile over the subgrade to ensure separation between the base from the soil and limit weed growth. (picture of excavating)
- 2 Install the base and ensure it is well compacted. Install the bedding sand, compact and screed to ensure the layer is flat.
- 3 Set pavers. Use spacer to ensure 4mm joint space. Tamp them lightly to make sure they are level. Install an edge restraint or mortar set pavers along the edge.
- 4 Clean out the joints and then sweep polymeric sand into the open joints until they are completely full. Remove all excess sand and dust from the surface. Mist the pavement with water to activate the polymer and cure the mixture.

MORTAR SET

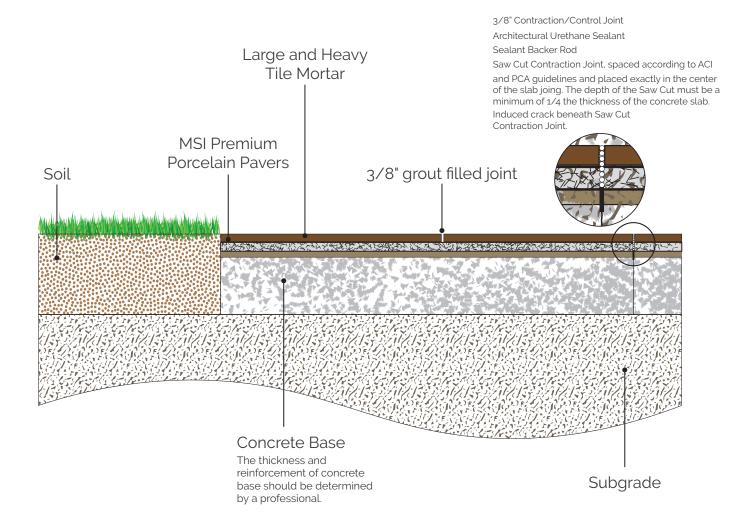


- · To avoid chipping the porcelain paver, only use a tile saw that has a wet cut porcelain blade.
- · Spacers are necessary when installing porcelain pavers.
- CAUTION: Do not compact the porcelain pavers with a plate compactor.


*Additional setting methods Stepping Stone on grass Pedestals

STEP X STEP

INSTALLATION

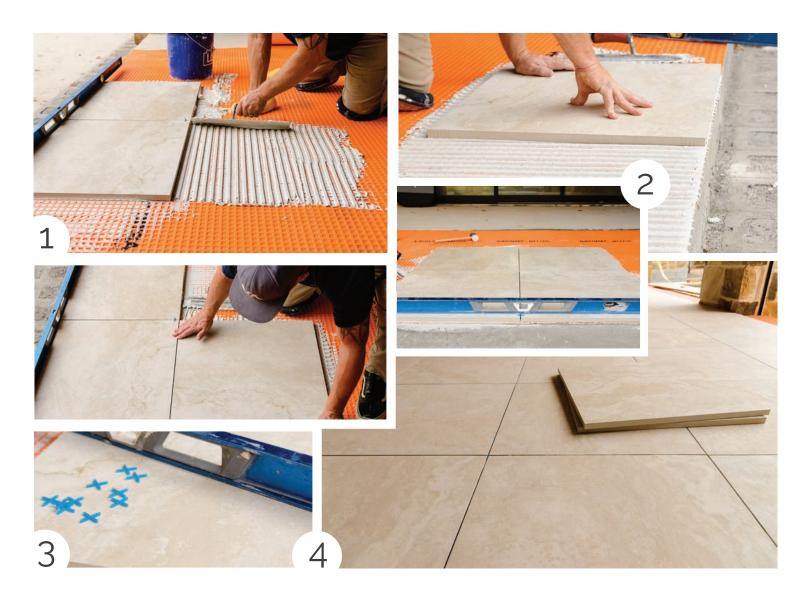


- 1 Ensure the concrete base is angled away from the building. Install a crack suppression membrane (optional) to limit reflective cracking.
- Align the control joint in the concrete base with a porcelain paver joint.
- 2 Set the pavers using a Large and Heavy Tile Mortar such as ProLite Premium Large Format Tile Mortar or MegaLite Ultimate Crack Preventionmortar.
- 4 Use an exterior grade grout to fill the joints.

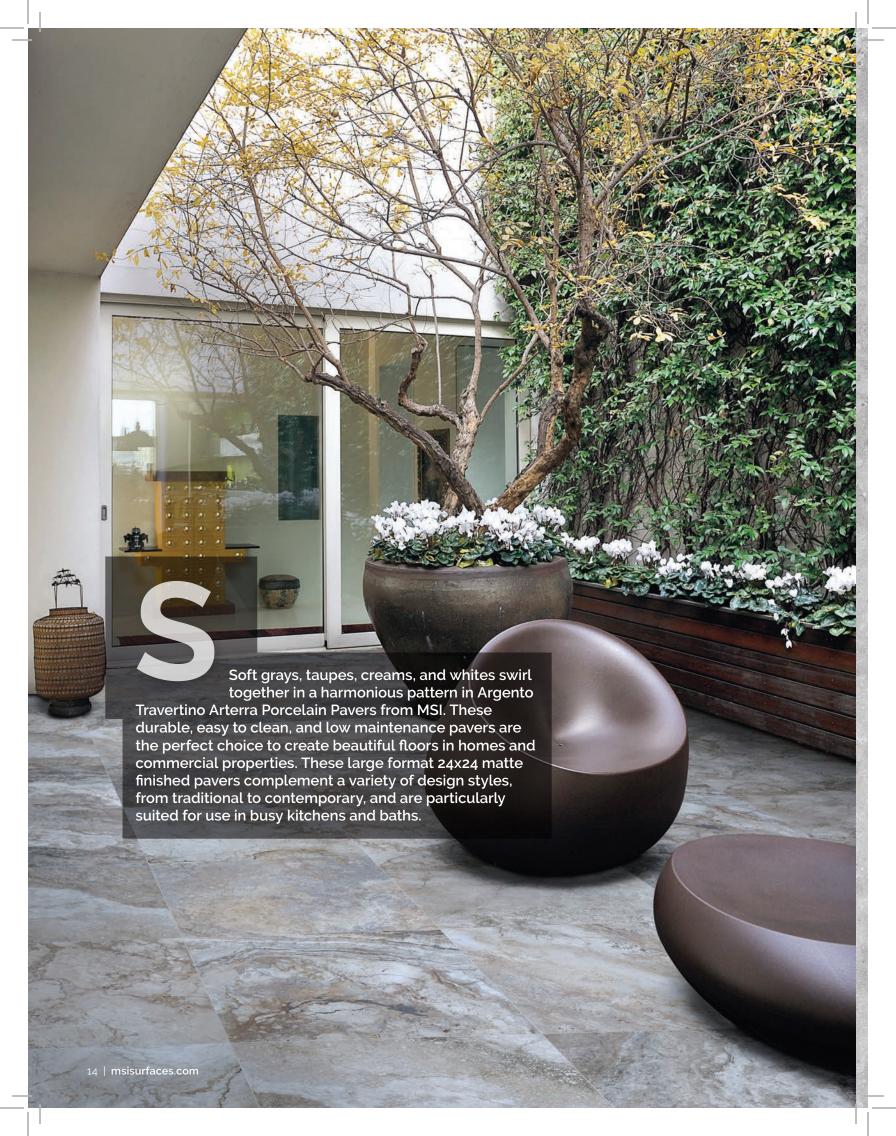



BETON ANTRACITE

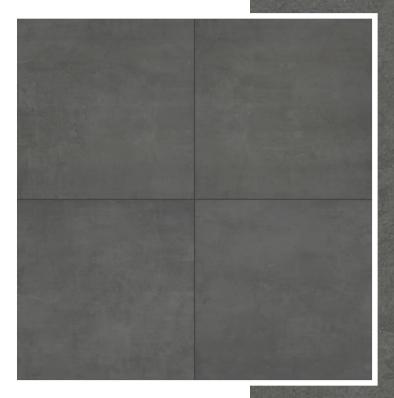

LPAVNBETANT2424 24" X 24" RECTIFIED PAVER


LCOPNBETANT1324 13" X 24" COPING





BETON BLANCO LPAVNBETBLA2424 24" X 24" RECTIFIED PAVER LCOPNBETBLA1324 13" X 24" COPING 19 | msisurfaces.com

BETON GREY

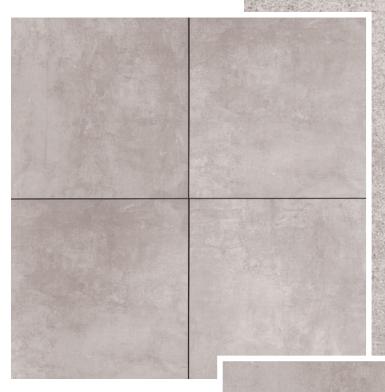

LPAVNBETGRE2424

24" X 24" RECTIFIED PAVER

LPAVNBETGRE1632

16" X 32" RECTIFIED PAVER

LCOPNBETGRE1324

13" X 24" 2cm BULLNOSE COPING

LCOPNBETGRE1324-ROU3CM

13" X 24" 3cm BULLNOSE COPING

LCOPNBETGRE1324-EAS3CM

13" X 24" 3cm EASED EDGE COPING



BETON SAND



LPAVNBETSAND2424 24" X 24" RECTIFIED PAVER















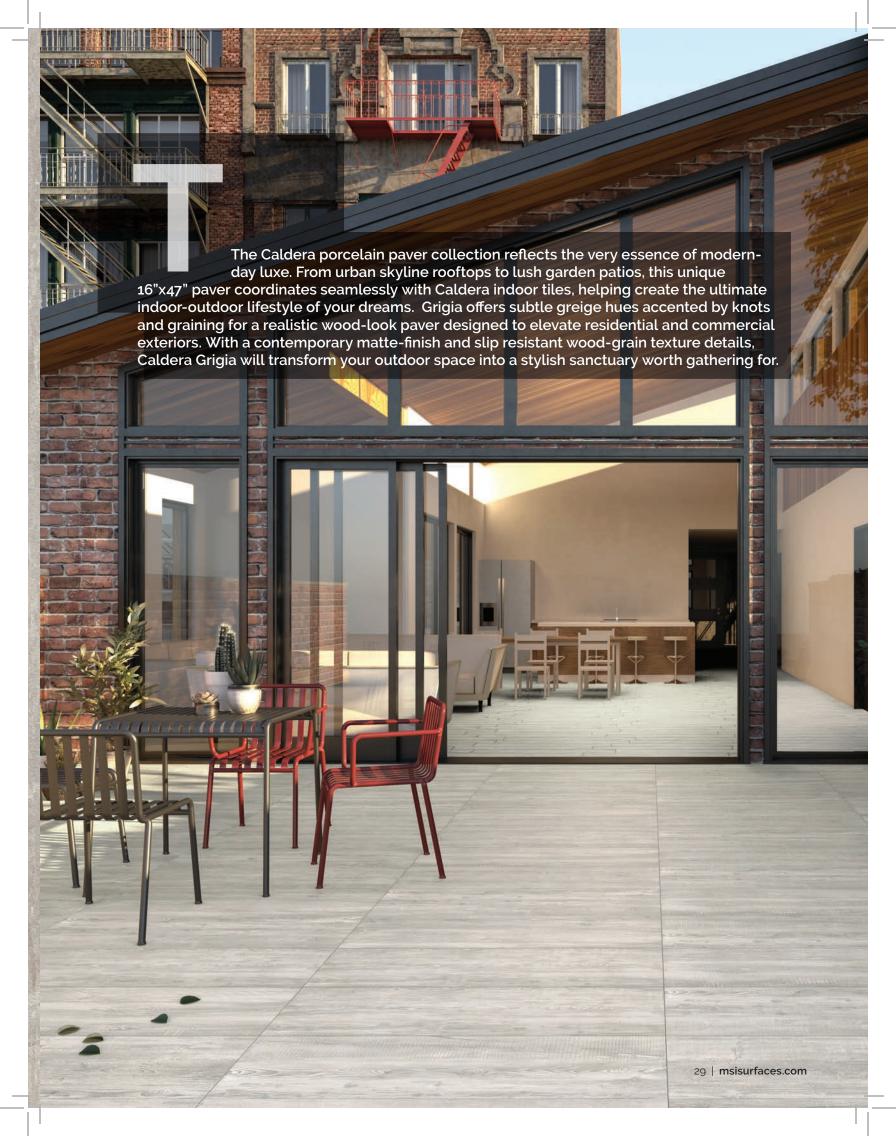

CONCERTO GRIGIO

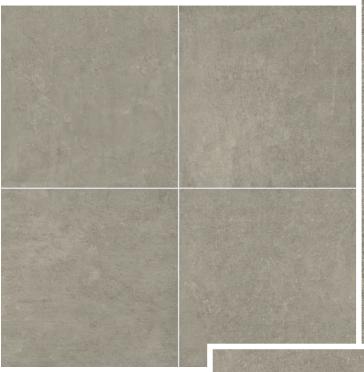

LPAVNCONGRI2424 24" X 24" RECTIFIED PAVER

LPAVNCONGRI1836 18" X 36" RECTIFIED PAVER







FOSSIL SNOW PATTERN LPAVNFOSSNOPAT PATTERN (24"X24", 12"X24", 12"X12") LCOPNFOSSNO1324 13" X 24" COPING 33 | msisurfaces.com

GOLDEN WHITE



LPAVNGOLWHI2424 24" X 24" RECTIFIED PAVER

LCOPNGOLWHI1324 13" X 24" COPING



















LPAVNLUCBET1248 12" X 48" RECTIFIED PAVER

LCOPNLUCBET1324 13" X 24" COPING

Lucas Betulla Arterra Porcelain Pavers feature the look of natural hardwood in easy care and no maintenance porcelain material. These beautiful pavers are ideal for creating stunning yet durable floors that look like wood, in entryways, bathrooms, kitchens, and laundry rooms, or wherever you hesitate to put natural hardwood due to moisture or required upkeep. These gorgeous pavers complement a variety of other natural stone slabs and tiles from MSI's extensive inventory. 43 | msisurfaces.com
















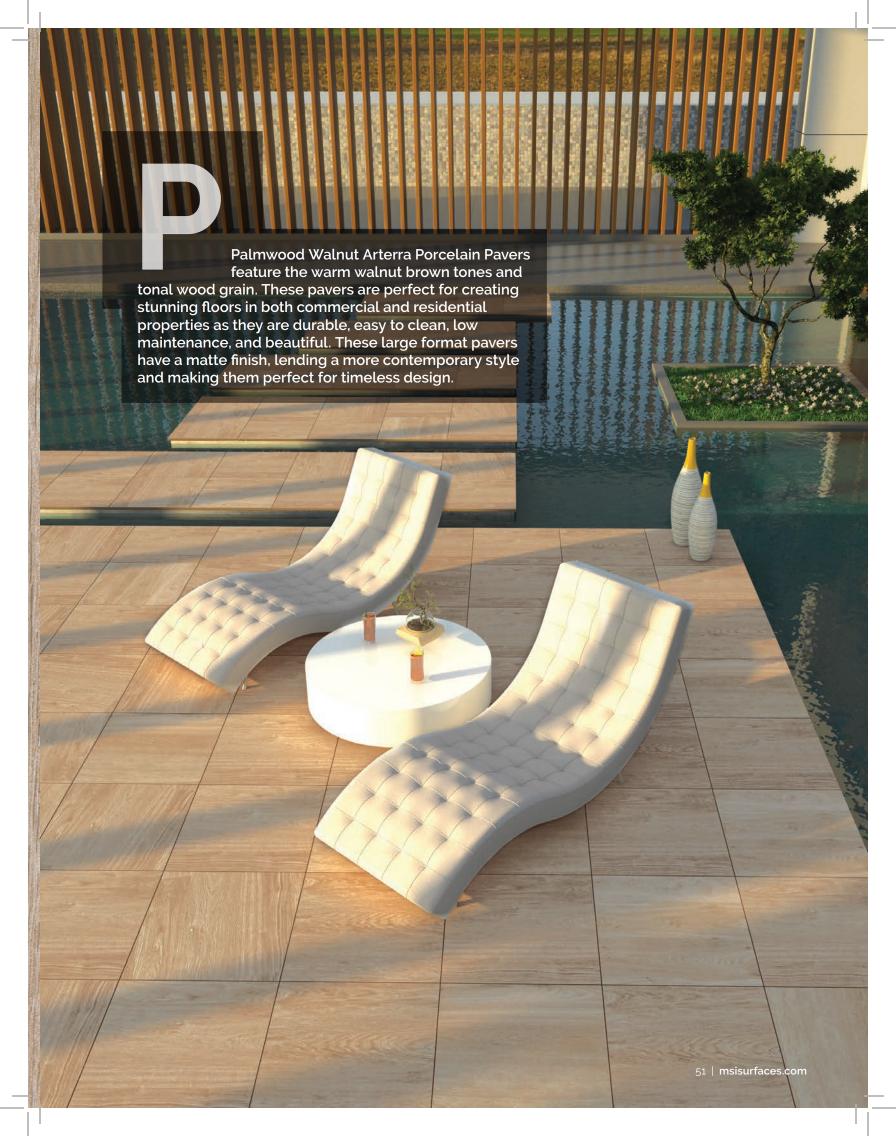





PETRA BEIGE



LPAVNPETBEI2424 24" X 24" RECTIFIED PAVER

LCOPNPETBEI1324

13" X 24" 2cm BULLNOSE COPING

LCOPNPETBEI1324-ROU3CM

13" X 24" 3cm BULLNOSE COPING

LCOPNPETBEI1324-EAS3CM

13" X 24" 3cm EASED COPING













LPAVNPRACRE2424 24" X 24" RECTIFIED PAVER

LPAVNPRACRE1632 16" X 32" RECTIFIED PAVER



INDOOR / OUTDOOR

Interior Tiles Available: 12" X 24" NPRACRE1224 24" X 48" NPRACRE2448 2" X 2" MOSAIC NPRACRE2X2 3" X 24" BULLNOSE NPRACRE3X24BN














TERRAZO GLACIER



LPAVNTERGLA2424 24" X 24" RECTIFIED PAVER

LCOPNTERGLA1324 13" X 24" COPING

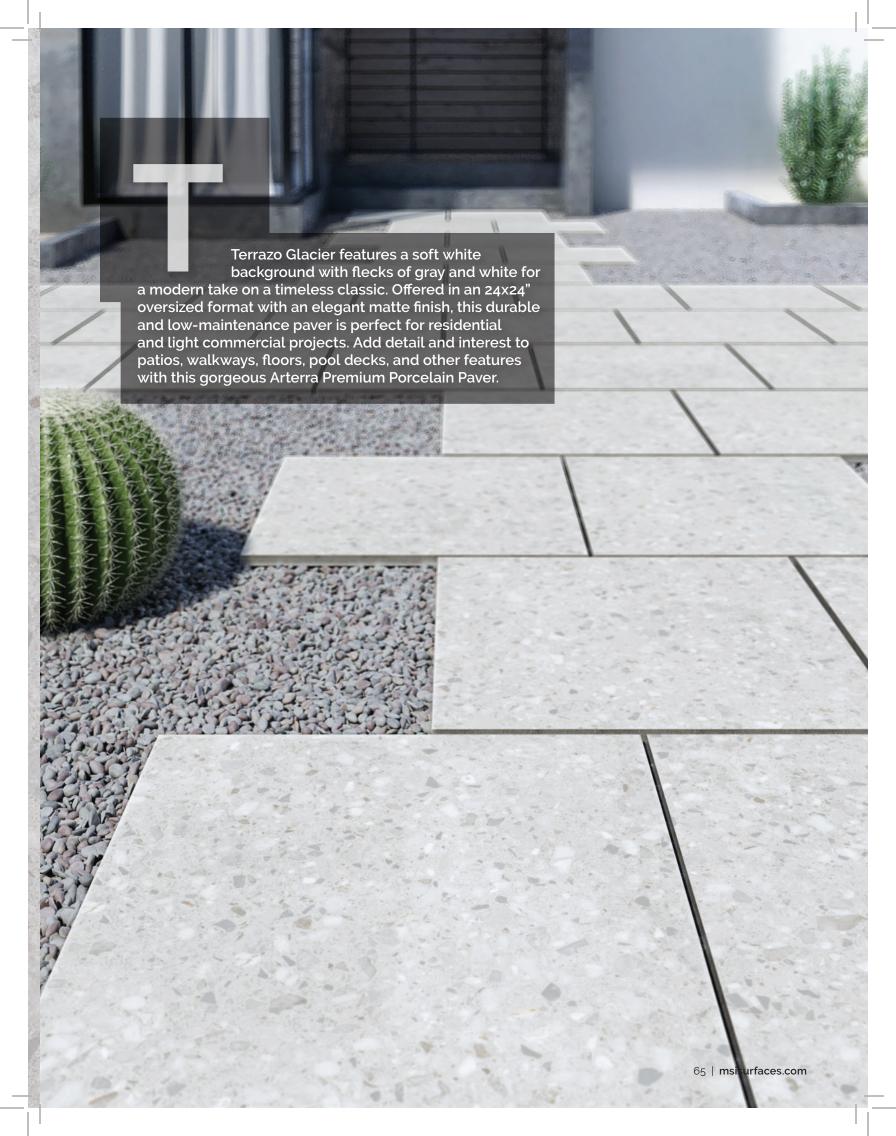










LPAVNTIEBEI2424 24" X 24" RECTIFIED PAVER

LCOPNTIEBEI1324 13" X 24" COPING

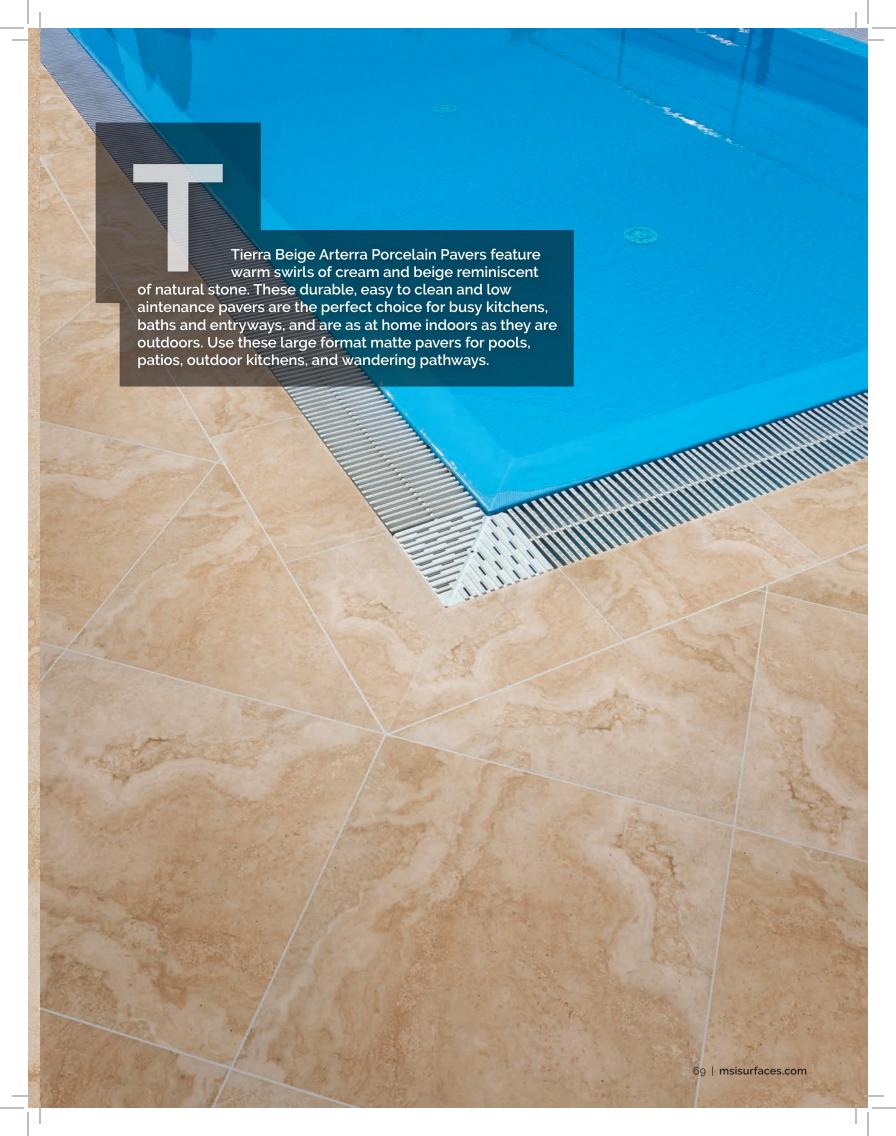







TRUE BLUESTONE

LPAVNTRUBLU2424

LPAVNTRUBLU2448

LCOPNTRUBLU1324 13" X 24" COPING

VULKON GREY



LPAVNVULGRE2424 24" X24" RECTIFIED PAVER

LCOPNVULGRE1324 13" X 24" COPING











From MSI

www.arterrapavers.com