


# Coal Canyon







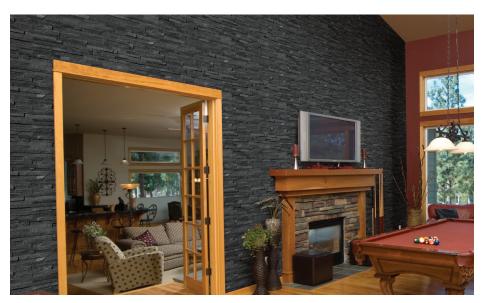





## Technical Information

Flat Panel 6"x24" 6"x12"x6" Corner : 0.5"-1" Thickness Approx. Weight : 6.67 lbs. Type Quartzite Splitface Finish

Average Compressive Strength: Dry/7800 Psi

Color: Black

Application: Walls, Barbeque areas, etc.

## Adhesive

- Exterior Application : A flexible latex based mortar system suitable for the stone is recommended.
- Interior Application : A thin set mortar suitable for the stone is recommended.
- For light colored stones, a white mortar is recommended.

# Packaging

: 6 pcs/box; 210 pcs/crate Panels : 6 pcs/box; 240 pcs/crate Corners

## Substrates

#### Exterior/Interior

- Fully cured concrete (at least 28 days cured)
- Masonry brick
- Regular brick
- Cement mortars
- Cementitious backer units

## Interior only

- Gypsum plaster (max 10" high)
- Gypsum wallboard (max 10" high)
- Exterior grade plywood (max 10" high)
- Cementitious backer units