


MSI

Making Dream Surfaces Attainable

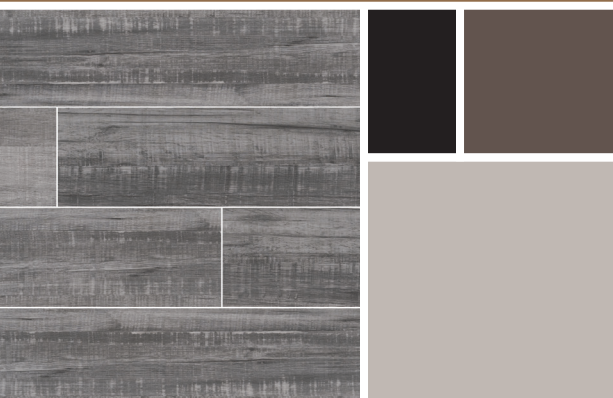


Belmond
Ceramic Collection

www.msisurfaces.com

Colors



Mercury 8"x40"

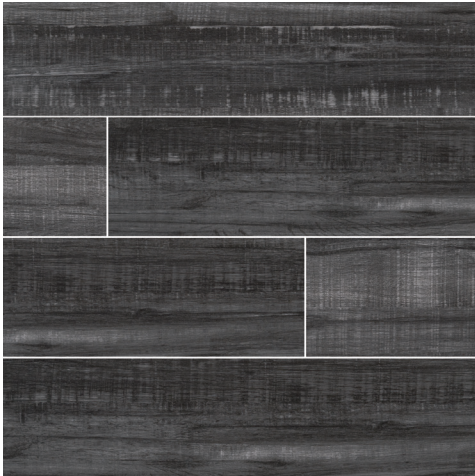

Obsidian 8"x40"



Pearl 8"x40"

Size	Thickness	MERCURY	OBSIDIAN	PEARL
8x40	3/8"	NBELMER8X40	NBELOBS8X40	NBELPEA8X40

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL	●	●	●	III	V3	DCOF - < 0.42 Wet	< 275 LBF	> 0.5%	5
LIGHT COMMERCIAL	●	●	●						
HEAVY COMMERCIAL			●						

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Non-Resistant	Resistant	Pressed	Glazed

The Belmond line features three gray color options in our newest wood plank tile. We took the latest trend in a contemporary graphic and created this line with ink jet technology to capture the look which is sure to be a hit for both floor and wall applications. Belmond is a value priced 8"x40" ceramic plank.

Technical Information

Primary Colors: Gray, Silver, Charcoal
Material Type: Ceramic
Finish: Matte

Features At A Glance

- Italian ink jet design in a value priced ceramic
- Latest trend in a wider and longer 8x40 wood plank tile
- Contemporary look and colors for both floor and wall applications

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.

