


MSI

Making Dream Surfaces Attainable

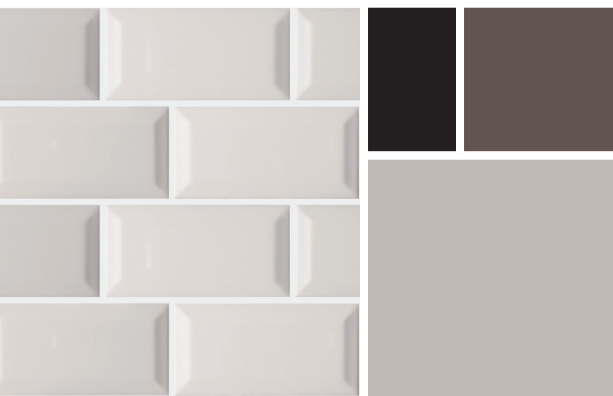

Ceramic Subway
Ceramic Collection

www.msisurfaces.com

Colors

Almond Glossy



3"x6"



3"x6" Beveled



3"x6" Inverted Beveled



3"x6" Inverted Beveled

Gray Glossy



3"x6"



3"x6" Beveled



3"x6" Inverted Beveled



3"x6" Inverted Beveled

White Glossy



3"x6"



3"x6" Beveled



3"x6" Inverted Beveled



3"x6" Inverted Beveled

Size	Thickness	ALMOND GLOSSY	GRAY GLOSSY	WHITE GLOSSY
3x6	1/4"	NALMGLO3X6-N	NGRAGLO3X6-N	NWHIGLO3X6-N
3x6 Beveled	1/4"	NALMGLO3X6BEV-N	NGRAGLO3X6BEV-N	NWHIGLO3X6BEV-N
3x6 Inverted Beveled	1/4"	NALMGLO3X6INVBEB-N	NGRAGLO3X6INVBEB-N	NWHIGLO3X6INVBEB-N
4x16	1/4"	NALMGLO4X16-N	NGRAGLO4X16-N	NWHIGLO4X16-N
3x6 Bullnose	1/4"	NALMGLO3X6BN-N	NGRAGLO3X6BN-N	NWHIGLO3X6BN-N
4x16 Bullnose	1/4"	NALMGLO4X16BN-N	NGRAGLO4X16BN-N	NWHIGLO4X16BN-N
4x12	1/4"			NWHIGLO4X12-N
4x12 Bullnose	1/4"			NWHIGLO4X12BN-N

Trim



3" x 6" Bullnose
4" x 16" Bullnose

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Freeze/Thaw	Breaking Strength	Water Absorption	Hardness	Chemical Resistance
RESIDENTIAL				N/A	V1	N/A	No	< 275 lbf	< 6-9%	3	No
LIGHT COMMERCIAL											
HEAVY COMMERCIAL											

The Ceramic Subway series is a wall tile line the brings back the retro look of rectangular subway tiles. Available in both White and Almond with a glossy finish, we are offering the traditional 3"x6" subway tile in both a flat and glossy finish with a beveled edge detail. We have also taken the retro look to a new dimension with a larger rectangle, 4"x16" to give a whole new look to the subway collection.

Technical Information

Primary Colors: White, Beige, Grey
Material Type: Ceramic
Finish: Glossy
Polished: Hardness / Mohs 5
Matte: Hardness / Mohs 7

Features At A Glance

- Classic 3x6 subway tiles and unique larger 4x16 tiles
- 3x6 tiles available in both flat and beveled edge detail
- Includes single edge bull nose for both sizes

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Disclaimer: Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust. Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo. Variation in shade is an inherent attribute of porcelain tile. To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.
*No claims accepted after tile installation.

