


MSI

Making Dream Surfaces Attainable

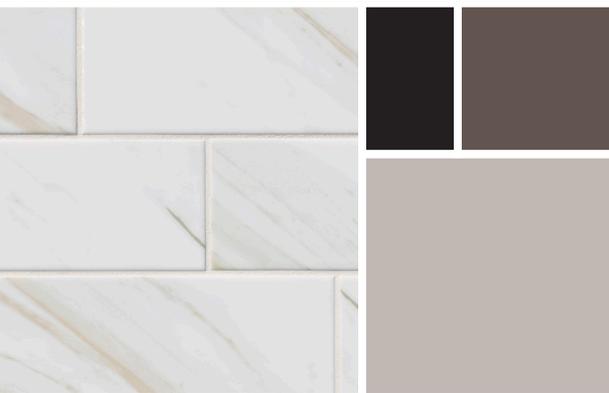

Classique
Ceramic Collection

www.msisurfaces.com

Colors



White Calacatta Glossy 4"x16"

White Carrara 4"x16"

Size	Thickness	WHITE CALACATTA GLOSSY	WHITE CARRARA
4x16	3/8"	NWHICALGLO4X16-N	NWHICARGLO4X16-N
4x16 Bullnose	3/8"	NWHICALGLO4X16BN-N	NWHICARGLO4X16SBN-N

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Freeze/Thaw	Breaking Strength	Water Absorption	Hardness	Chemical Resistance
RESIDENTIAL	●	●	●	I	V1	N/A	No	< 275 lbf	< 3-6%	N/A	Resistant
LIGHT COMMERCIAL	●	●	●								
HEAVY COMMERCIAL											

The Classique series is a wall tile line that brings back the retro look of rectangular subway tiles. Available in two colors with a glossy finish, we are offering this line of subway in popular natural stone looks. We have taken the retro look to a new dimension with a larger rectangle, 4"x16" to give a whole new look to the subway collection. This series also has a single edge bull nose available for both colors.

Technical Information

Primary Colors: Beige, Grey, White
 Material Type: Glazed Ink Jet Ceramic
 Finish: With texture, Glossy finish
 Polished: Hardness / Mohs 5
 Matte: Hardness / Mohs 7

Features At A Glance


- Unique large 4x16 tiles
- Available in popular natural stone looks
- Ink Jet technology with a glossy finish
- Includes single edge bull nose for all colors

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Trim



4" x 16" Bullnose

Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.

