


MSI


Making Dream Surfaces Attainable

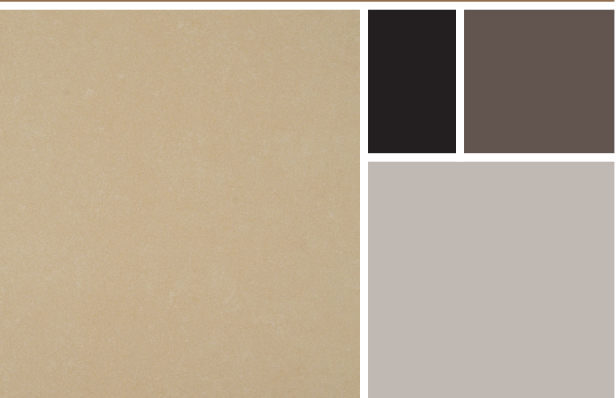

Dimensions
Porcelain Collection

www.msisurfaces.com

Colors

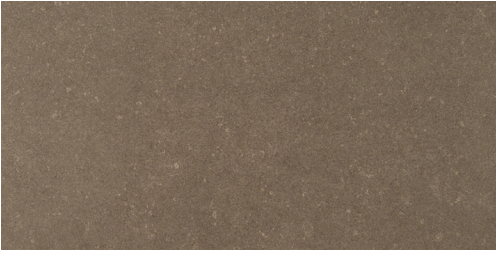

Concrete 12"x24"



Glacier 12"x24"



Graphite 12"x24"



Gris 12"x24"

Size	Thickness	CONCRETE	GLACIER	GRAPHITE	GRIS
12X24 Matte	3/8"	NDIMCON1224-N	NDIMGLA1224-N	NDIMGRA1224-N	NDIMGRI1224-N
24X24 Matte	3/8"	NDIMCON2424-N	NDIMGLA2424-N	NDIMGRA2424-N	NDIMGRI2424-N
2X2 Matte	3/8"	NDIMCON2X2-N	NDIMGLA2X2-N	NDIMGRA2X2-N	NDIMGRI2X2-N
24X48 Matte	3/8"	NDIMCON2448-N	NDIMGLA2448-N	NDIMGRA2448-N	NDIMGRI2448-N
3X24 BN Matte	3/8"	NDIMCON3X24BN-N	NDIMGLA3X24BN-N	NDIMGRA3X24BN-N	NDIMGRI3X24BN-N

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				III	V2	DCOF - > 0.42 Wet	> 275 lbf	< 0.5%	6
LIGHT COMMERCIAL									
HEAVY COMMERCIAL									

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

Sleek, contemporary and sophisticated, the Dimensions series brings an urban edge with concrete look porcelain. This minimalistic style is available in six colors, ranging from Glacier white to Graphite grey, and also offers a matching bullnose and 2"x2" mosaic. The fullbody porcelain is rectified and long lasting for a nearly seamless finish.

Technical Information

Primary Colors: Gray, Beige
Material Type: Porcelain
Finish: Matte
Polished: Hardness / Mohs 5
Matte: Hardness / Mohs 7

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Disclaimer: Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust. Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo. Variation in shade is an inherent attribute of porcelain tile.
To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.
*No claims accepted after tile installation.

Features At A Glance

- Luxurious porcelain (Matte) tiles with authentic marble looks and colorations
- Six great colors in a wide variety of sizes and trims
- High Definition Ink Jet Technology

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Trim



3" x 24" Bullnose

