


MSI

Making Dream Surfaces Attainable

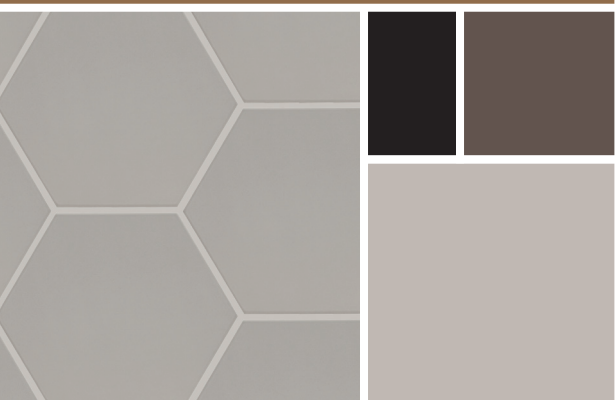

Hexley

Porcelain Collection

www.msisurfaces.com

Colors



Dove 9"x10.5" Ecu 9"x10.5" Graphite 9"x10.5" Hive 9"x10.5" Marbello 9"x10.5"

Size	Thickness	DOVE	ECRU	GRAPHITE	HIVE	MARBELLO
9x10.5	3/8"	NHEXDOV9X10.5HEX	NHEXECR9X10.5HEX	NHEXGRA9X10.5HEX	NHEXHIV9X10.5HEX	NHEXMAR9X10.5HEX

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	DCOF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				III	V1	DCOF > 0.42 Matte	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL				GRAPHITE					
HEAVY COMMERCIAL				II					

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Non-Rectified	Glazed

Luxury and durability come together in our Hexley Collection. Available in matte and polished finishes and in the most sought after large format sizes 9"x10.5" Hexley gives floors, walls, and countertops a classic yet modern aesthetic that's welcomed in any home or commercial space. Indoors or out, no matter where this stylish collection goes the compliments are sure to follow.

Technical Information

Primary Colors: Black, Gray, & Whites
Material Type: Porcelain
Finish: Matte
Polished: Hardness / Mohs 5
Matte: Hardness / Mohs 7

Features At A Glance

- Hexagon 9x10.5
- 5 Color In a Natural Concrete Look
- Available In a Matte Finishes

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



Disclaimer:

Wet Cutting Instruction We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.