


MSI

Making Dream Surfaces Attainable

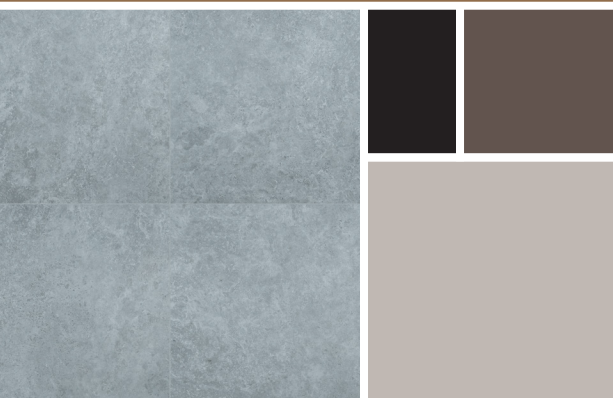

Legions

Porcelain Collection

www.msisurfaces.com

Colors



Lunar Silver 24"x24"



Montauk Black 24"x24"



Quartz White 24"x24"

Size	Thickness	LUNAR SILVER	MONTAUK BLACK	QUARTZ WHITE
2X2 Matte	3/8"	NLUNSIL2X2	NMIDMON2X2	NQUAWHI2X2
24X24 Matte	3/8"	NSILTRA2424	NMONBLA2424	NQUAWHI2424
24X48 Matte	3/8"	NSILTRA2448	NMONBLA2448	NQUAWHI2448
24X24 Matte	2cm	LPAVNSILTRA2424	LPAVNMONBLA2424	LPAVNQUAWHI2424
24X48 Matte	2cm	LPAVNSILTRA2448	LPAVNMONBLA2448	LPAVNQUAWHI2448
13X24 Matte	2cm	LCOPNSILTRA1324	LCOPNMONBLA1324	LCOPNQUAWHI1324

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				III	V3	DCOF < 0.42	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL									
HEAVY COMMERCIAL									

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

The Legions Porcelain Tile Collection from MSI is a stylish and natural element to your indoor and outdoor space. Available in three colors with the appearance of natural stone, these porcelain tiles allow your design to flow effortlessly from room to garden. The tiles are offered in 24"x24" and 24"x48" formats with coordinating 2cm pavers. Create an eye-catching backsplash, accent wall, floor, patio, or walkway with these large-format tiles. Additionally, the Legions Collections the Ashton Collection has been certified GREENGUARD Indoor Air Quality Certified® for occupant health and wellbeing.

Technical Information

Primary Colors: Black,White & White-Cool
Material Type: Porcelain
Finish: MattePolished: Hardeness / Mohs 5
Matte: Hardness / Mohs 7

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Disclaimer : Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.
To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade.
Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.

Features At A Glance

- Unique large Format 24x48 with matching pavers
- 3 colors in a Concrete Look
- Available in Matte finish

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

