

MSI

Making Dream Surfaces Attainable



LEGIONS

Porcelain Tile Collection



LUNAR SILVER



MIDNIGHT MONTAGE



TAJA IVORY



QUARTZ WHITE





Making Dream Surfaces Attainable


www.msisurfaces.com



LEGIONS

Porcelain Tile Collection

COLORS

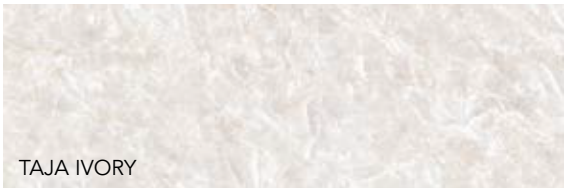

Technical Information

Primary Colors: Black, White, White-Cool, Ivory
Material Type: Porcelain
Finish: Matte
Edge: Rectified

Features At A Glance

- Unique large Format 24x48
- 4 Colors In a Stone Look
- Available only in Matte Finishes

Installation

1/8" Grout Size is recommended on all tile installation.
When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Color shade variations:

The color shade of every tile varies from piece to piece and from each production. At least several pieces from the same production should be reviewed whenever possible in order to determine acceptable color shade variations. Any questions or concerns about your tile selection should be clarified before fixing.



V1
UNIFORM APPEARANCE



V2
SLIGHT VARIATION



V3
MODERATE VARIATION



V4
SUBSTANTIAL VARIATION

Care and Maintenance:

Regular cleaning is the best way to keep Legions tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. No waxes or sealers are needed.

MSI International, Inc.
2095 North Batavia - Orange, CA 92865

SIZES



24"x24"

Lunar Silver NLUNSIL2424
Midnight Montage NMIDMON2424
Taja Ivory NTAJIVO2424
Quartz White NQUAWHI2424



2"x2" mosaic - 12"x12" sheet

Lunar Silver NLUNSIL2X2
Midnight Montage NMIDMON2X2
Taja Ivory NTAJIVO2X2
Quartz White NQUAWHI2X2



24"x48"

Lunar Silver NLUNSIL2448
Midnight Montage NMIDMON2448
Taja Ivory NTAJIVO2448
Quartz White NQUAWHI2448

| | TEST METHOD | | LEGIONS VALUES |
|--|--------------------|--|----------------|
| | ISO 10545.3 | WATER ABSORPTION | < 0,5% |
| | ISO 10545.12 | FROST RESISTANCE | √ |
| | ISO 10545.4 | FLEXION RESISTANCE | √ |
| | ISO10545.9 | RESISTANCE TO THERMAL SHOCK | √ |
| | ISO 10545.13 | CHEMICAL RESISTANCE | √ |
| | ISO 10545.14 | STAIN RESISTANCE | √ |
| | ISO 10545.2 | DIMENSIONS | √ |
| | UNI EN ISO 10545.6 | RESISTANCE TO DEEP ABRASION | √ |
| | UNI EN ISO 10545.7 | RESISTANCE TO ABRASION - PEI RESEARCH | PEI IV |
| | MOHS | HARDNESS | 7 |
| | BCR TORTUS | COEFFICIENT OF DYNAMIC FRICTION | √ |
| | DCOF | DYNAMIC COEFFICIENT OF FRICTION | < 0.42 |
| | ASTM C 1028 | DETERMINATION OF THE STATIC FRICTION COEFFICIENT | √ |
| | | TILE THICKNESS | 9,5 mm |

Disclaimer: Wet Cutting Instruction

We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust. Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims will be accepted after the tiles are installed.



Reuse of 100%
Of greenware
waste



Reuse/recycling
of 100% of fired
waste



Recycling of
100% of non-
ceramic waste



Reuse of 100%
of process
wastewater



Low
atmospheric
emissions



Large reduction
in energy use



Use of 100%
recyclable
packaging



FAO pallets

