

MSI

Making Dream Surfaces Attainable



Loft


Porcelain Collection

www.msisurfaces.com

Colors



Glacier 12"x24"

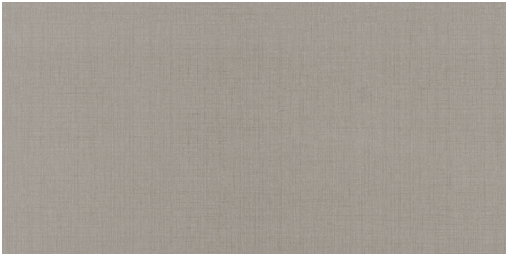

Gris 12"x24"



Olive 12"x24"

Size	Thickness	GLACIER	GRIS	OLIVE
12X24	3/8"	NLOFGLA1224-N	NLOFGRI1224-N	NLOFOLI1224-N
2X2	3/8"	NLOFGLA2X2-N	NLOFGRIS2X2-N	NLOFOLI2X2-N
3X18	3/8"	NLOFGLA3X18BN-R	NLOFGRI3X18BN-R	NLOFOLI3X18BN-R

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				III	V2	SCOF - > 0.60 Wet DCOF - > 0.42 Wet	> 275 lbf	< 0.5%	5
LIGHT COMMERCIAL									
HEAVY COMMERCIAL									

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

Texture and dimension are the latest trends in porcelain, beautifully personified in the Loft series. The 12"x24" inch tile features a crossweave fabric feel that, unlike actual fabric, won't require ironing. The rectified edges compose a nearly seamless surface, and contemporary color choices include Glacier, Khaki, Olive and Gray. Combine with the Dimensions series for a dynamic installation.

Technical Information

Primary Colors: Beige, Gray
Material Type: Porcelain
Finish: Matte
Polished: Hardness / Mohs 5
Matte: Hardness / Mohs 7

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Features At A Glance

- Luxurious porcelain (Matte) tiles with authentic marble looks and colorations
- Three great colors in a wide variety of sizes and trims
- High Definition Ink Jet Technology

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Trim



3" x 18" Bullnose



Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.