


MSI


Making Dream Surfaces Attainable

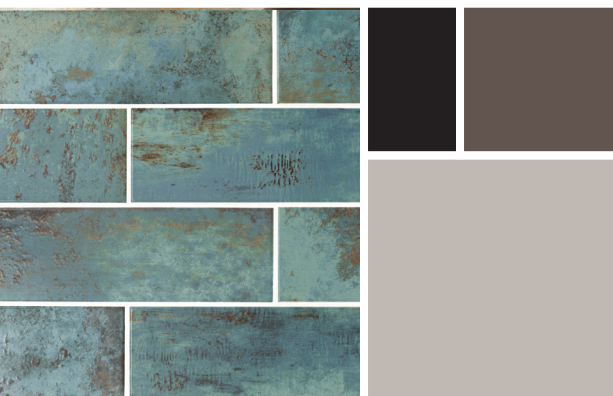

Marza
Ceramic Collection

www.msisurfaces.com

Colors

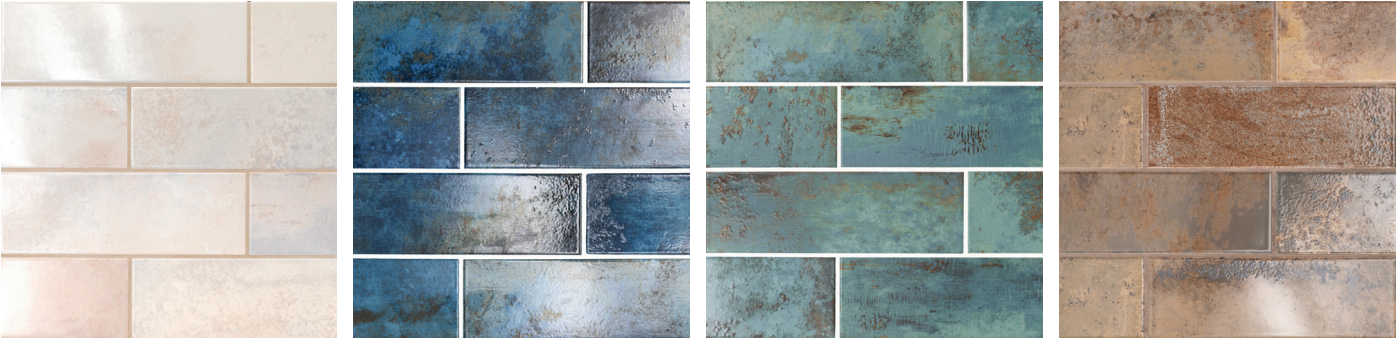

MARZA PEARL 4"x12" MARZA COBALT 4"x12" MARZA AQUA 4"x12" MARZA RUST 4"x12"

Size	Thickness	MARZA PEARL	MARZA COBALT	MARZA AQUA	MARZA RUST
4x12	3/8"	NMARPEA4X12G	NMARCOB4X12G	NMARQU4X12G	NMARRUS4X12G

APPLICATIONS	Backsplash	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL	●	●	I	V4	N/A	< 275 lbf	< 0.5%	3
LIGHT COMMERCIAL	●	●						
HEAVY COMMERCIAL	●	●						

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Pressed	Glazed

Marza Subway Tiles features have a striking blend of tones that are ONE-OF-A-KIND addition to any kitchen backsplash, shower surround, or accent wall. Earthy brown tones, blues and greens, creamy whites, gold, bronze, copper and grays with a glossy finish that provides an extremely delicate or refined quality. These 4"x12" tiles are easy to clean and maintain. Marza is versatile, allowing for design flexibility and creative installations in your kitchen, shower, bath surround, and many more wall applications.

Technical Information

Primary Colors: White, Blue, Green and Brown
Material Type: Ceramic
Finish: Glossy
Polished: Hardness / Mohs 5
Matte: Hardness / Mohs 7

Features At A Glance

- 4 colors
- Earthy Tones

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.