



MSI

Making Dream Surfaces Attainable

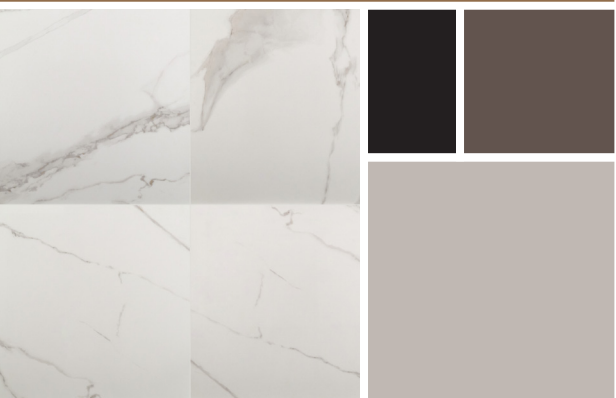

MONZA
Porcelain Collection
www.msisurfaces.com

Colors



Cemento 35"x35"



Marbello 35"X35"

Size	Thickness	CEMENTO	MARBELLO
35x35 Polished	3/8"	NMONCEM3535P	NMONMAR3535P
35x35 Matte	3/8"	NMONCEM3535	NMONMAR3535

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				III	V4	DCOF < 0.42 Polished DCOF > 0.42 Matte	> 275 lbf	< 0.5%	6
LIGHT COMMERCIAL									
HEAVY COMMERCIAL									

Freeze / Thaw	Abrasion Resistance	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	IV	Resistant	Rectified	Glazed

Monza Porcelain large format tile collection - A beautifully diverse collection of porcelain large format tiles. This dynamic duo ranges from a cement and concrete industrial design to an elegant marble classic look. Both 35x35 tiles are available in matte and polished finish. Use Monza to develop a statement outdoor or indoor flooring. Forever enhance the charm of each rooms wall space with timeless style and traditional beauty.

Technical Information

Primary Colors: White & Gray
Material Type: Porcelain
Finish: Polished & Matte
Polished: Hardness / Mohs 5
Matte: Hardness / Mohs 7

Features At A Glance

- 3 different colors 35X35
- High quality Ink Jet technology

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.