


# MSI

Making Dream Surfaces Attainable

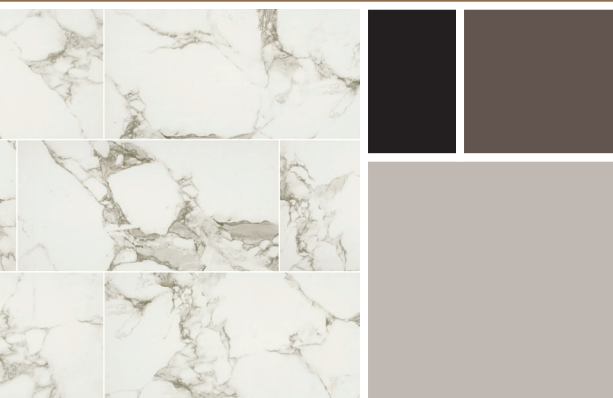

Pietra Porcelain  
Polished & Matte

[www.msisurfaces.com](http://www.msisurfaces.com)

Colors



Calacatta 12"x24"



Carrara 12"x24"



Statuario 12"x24"

Size	Thickness	CALACATTA	CARRARA	STATUARIO
12X24 Matte	3/8"	NCAL1224-N	NCAR1224-N	NSTA1224-N
12x24 Polished	3/8"	NPIECAL1224P-N	NPIECAR1224P-N	NPIESTA1224P-N
24x24 Matte	3/8"	NCAL2424-N	NCAR2424-N	NSTA2424-N
24x24 Polished	3/8"	NPIECAL2424P-N	NPIECAR2424P-N	NPIESTA2424P-N
2x2 Mosaic Matte	3/8"	NCAL2X2-N	NCAR2X2-N	NSTA2X2-N
2x2 Mosaic Polished	3/8"	NPIECAL2X2P-N		
2x2 Hex Mosaic Matte	3/8"	NCAL2X2HEX-N	NCAR2X2HEX-N	NSTA2X2HEX-N
2x4 Mosaic Polished	3/8"	NPIECAR2X4P-N	NPIECAL2X4P-N	NPIESTA2X4P-N
3x18 Bull Nose Matte	3/8"	NCAL3X18BN-R	NCAR3X18BN-R	NSTA3X18BN-R
3x18 Bull Nose Polished	3/8"	NPIECAL3X18BNG-N	NPIECAR3X18BNG-N	NPIESTA3X18BNG-N

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	DCOF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL	●	●	●	III	V3	Matte DCOF - > 0.42 Wet Polished DCOF - < 0.42 Wet	> 275 lbf	< 0.5%	6
LIGHT COMMERCIAL	●	●	●						
HEAVY COMMERCIAL		●	●						

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

Inspired by natural stone from around the world, the Pietra collection offers exceptionally realistic stone looks in dependable porcelain. This robust tile line delivers incredible style in a multitude of sizes and looks, from crisp white marbles to rich caramel travertines. Take your pick and design your dream space with Pietra.

Technical Information

Primary Colors: White  
Material Type: Porcelain  
Finish: Polished & Matte  
Polished: Hardness / Mohs 5  
Matte: Hardness / Mohs 7

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

**Disclaimer : Wet Cutting Instruction:** We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust. Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo. Variation in shade is an inherent attribute of porcelain tile.  
To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

\*No claims accepted after tile installation.

Features At A Glance

- Glazed, polished porcelains emulating the most popular stone looks
- Rectified edges and Nano technology help create virtually maintenance free applications
- Available in a large array of sizes to suit most designs and customers desires

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Trim



3" x 18" Bullnose

