


# MSI

Making Dream Surfaces Attainable

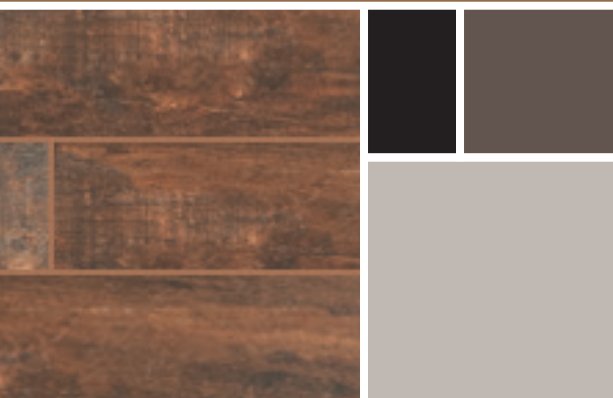


Redwood  
Porcelain Collection

[www.msisurfaces.com](http://www.msisurfaces.com)



Colors

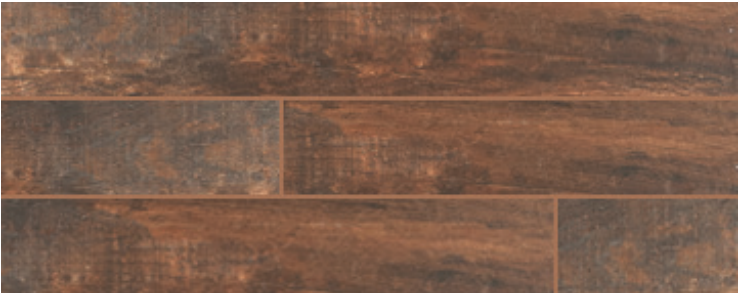

Mahogany 6"x36"



Natural 6"x36"

Size	Thickness	MAHOGANY	NATURAL
6X24	3/8"	NREDMAH6X24	NREDNAT6X24
6X36	3/8"	NREDMAH6X36	NREDNAT6X36
8X48	3/8"	NREDMAH8X48-N	NREDNAT8X48-N

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				III	V3	SCOF - < 0.60 Wet DCOF - > 0.42 Wet	> 275 lbf	< 0.5%	5
LIGHT COMMERCIAL									
HEAVY COMMERCIAL									

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

The Redwood series replicates the patina and allure of reclaimed wood. The distressed appearance of these porcelain tiles showcases dramatic texture reminiscent of salvaged building materials. Mahogany, a rich brown-red, and Natural, a lighter blond-gray, emphasize the graining of this artful series.

Technical Information

Primary Colors: Mahogany, Natural  
Material Type: Glazed Porcelain  
Finish: Hand Scraped  
Polished: Hardness / Mohs 5  
Matte: Hardness / Mohs 7

Features At A Glance

- Rectified tiles allowing smaller grout joints
- Sizes Available: 6x24, 6x36, and now 8x48 planks
- High Definition Ink Jet Technology

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



Disclaimer:

**Wet Cutting Instruction:** We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

\*No claims accepted after tile installation.