


MSI

Making Dream Surfaces Attainable

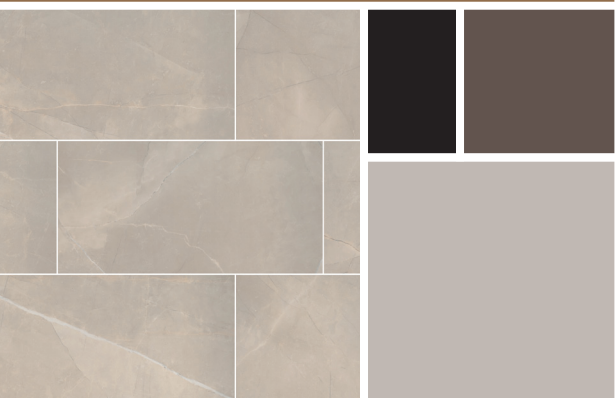

Sande

Porcelain Collection

www.msisurfaces.com

Colors



Cream 12"x24"



Grey 12"x24"



Ivory 12"x24"

Size	Thickness	CREAM	GREY	IVORY
12x24 Matte	3/8"	NSANCRE1224	NSANGRE1224	NSANIVO1224
12x24 Polished	3/8"	NSANCRE1224P	NSANGRE1224P	NSANIVO1224P
24X24 Matte	3/8"	NSANCRE2424	NSANGRE2424	NSANIVO2424
24x24 Polished	3/8"	NSANCRE2424P	NSANGRE2424P	NSANIVO2424P
24X48 Matte	3/8"	NSANCRE2448	NSANGRE2448	NSANIVO2448
24x48 Polished	3/8"	NSANCRE2448P	NSANGRE2448P	NSANIVO2448P
2x2 Matte	3/8"	NSANCRE2X2	NSANGRE2X2	NSANIVO2X2
2X2 HEX Matte	3/8"	NSANCRE2X2HEX	NSANGRE2X2HEX	NSANIVO2X2HEX
2x4 Polished	3/8"	NSANCRE2X4P	NSANGRE2X4P	NSANIVO2X4P
3X18 Matte	3/8"	NSANCRE3X18BN-K	NSANGRE3X18BN-K	NSANIVO3X18BN-K
3x18 Polished	3/8"	NSANCRE3X18BNP	NSANGRE3X18BNP	NSANIVO3X18BNP

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL	●	●	●	III	V3	DCOF < 0.42 Polished DCOF > 0.42 Matte	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL	●	●	●						
HEAVY COMMERCIAL		●	●						

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

The Sande Collection features stunning stone looks in an easy care porcelain perfect for the modern family who desires elegance and practicality. In three understated tone on tone shades Grey, Ivory, and Cream. Sande complements any color scheme you throw at it. Sande Collection tile makes a statement on floors, walls, shower surrounds, countertops and other spaces where easy care elegance is welcomed. Complete your project with coordinating 3"x24" bullnose tile for a professional finish.

Technical Information

Primary Colors: Cream, Beige
Material Type: Porcelain
Finish: Polished
Polished: Hardeness / Mohs 5
Matte: Hardness / Mohs 7

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Disclaimer : Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo. Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.


*No claims accepted after tile installation.

Features At A Glance

- Unique stone 12x24,24x24 and 24x48 look
- 3 Colors in wood look
- All 3 colors available in polished finish

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Trim



3" x 18" Bullnose

