


MSI

Making Dream Surfaces Attainable

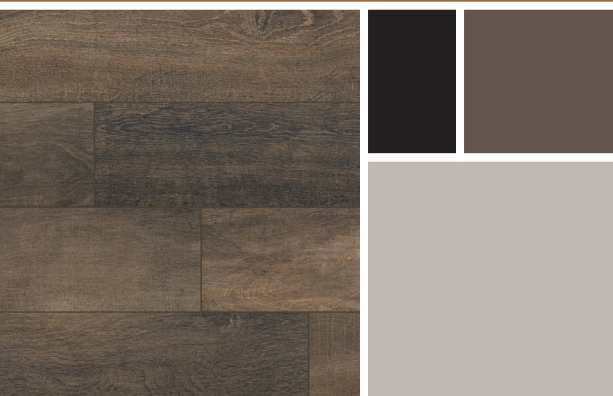

Upscape
Porcelain Collection

www.msisurfaces.com

Colors



Bruno 6"x40"



Greige 6"x40"



Nero 6"x40"

Size	Thickness	BRUNO	GREIGE	NERO
6X40	3/8"	NUPSBRU6X40	NUPSGRE6X40	NUPSNER6X40

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	DCOF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				IV	V3	DCOF - < 0.42 Wet	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL									
HEAVY COMMERCIAL									

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

The Upscape wood line uses the latest technology to bring the look of a high quality stained wood from the Colonial era. With three unique hues emulating the darker, more expensive hardwood floors, in two plank sizes with a 6"x40".

Technical Information

Primary Colors: Black, Brown
Material Type: Glazed Porcelain
Finish: Matte
Polished: Hardness / Mohs 5
Matte: Hardness / Mohs 7

Features At A Glance

- Three distinct colors are created with a light punch and the depth of the graphics
- High definition Ink Jet technology with more than 16 faces on pressed Italian tile for ease in installing
- Two sizes, 6x40 and 3x18 to cover most installation applications

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



Disclaimer:

Wet Cutting Instruction We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.