


# MSI

Making Dream Surfaces Attainable



UrbanSlat  
Ceramic Collection  
[www.msisurfaces.com](http://www.msisurfaces.com)

## Colors

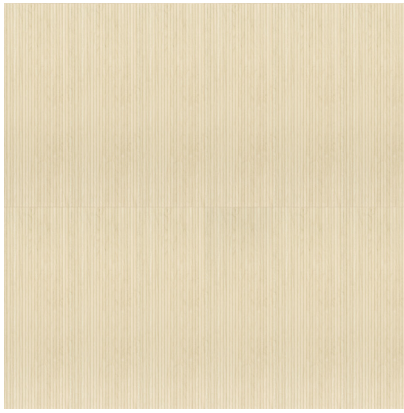

Urbanslat Blonde 16"x48"



Urbanslat Natural 16"x48"



Urbanslat White 16"x48"

Size	Thickness	BLONDE	NATURAL	WHITE
16X48	0.46"	NURBSLABLO1648	NURBSLANAT1648	NURBSLAWHI1648

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	DCOF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL			●	II	V2	N/A	< 275 lbf	> 10.0%	3
LIGHT COMMERCIAL			●						
HEAVY COMMERCIAL									

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Non-Resistant	Resistant	Rectified	Glazed

Elevate your interiors with the UrbanSlat Wall Tile Collection, achieving a new level of sophistication. These ceramic tiles, measuring 16" x 48", present an array of serene neutral tones ranging from cool white to warm honey blonde. With a unique 3D linear pattern, these oversized large format tiles are not only highly on-trend but easy to install, and with minimized grout lines, they blend seamlessly upon installation. Be it adorning a kitchen backsplash, a bathroom shower surround, or other vertical surfaces, these ceramic wall tiles are the perfect fit in both residential and commercial spaces. Boasting a matte finish for each unique shade, this collection is the ideal choice for diverse decor themes from traditional to shabby chic.

### Technical Information

Primary Colors: Blonde, Natural and White  
 Material Type: Ceramic  
 Finish: Matte  
 Matte Hardness/Mohs 3

### Features At A Glance

- Unique large Format 16X48
- 3 unique colors in a wood look
- Available in a matte Finish

### Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

**Disclaimer: Wet Cutting Instruction:** We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

\*No claims accepted after tile installation.

