


MSI

Making Dream Surfaces Attainable

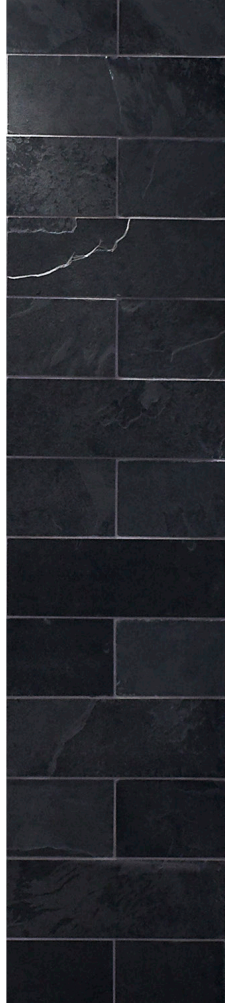

Asturia

Porcelain Collection

www.msisurfaces.com

Colors



Asturia Azul 12"x24"



Asturia Cielo 12"x24"



Asturia Fuoco 12"x24"

Size	Thickness	AZUL	CIELO	FUOCO
12x24 Matte	3/8"	NASTAZU1224	NASTFUO1224	NASTCIE1224
12x24 Polished	3/8"	NASTAZU1224P	NASTFUO1224P	NASTCIE1224P

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	DCOF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				III	V4	Polished < 0.42 Matte > 0.42	> 275 lbf	< 0.5%	7
LIGHT COMMERCIAL									
HEAVY COMMERCIAL									

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Rectified	Glazed

The Asturia Collection features three exquisite marble look tiles Azul, Cielo, and Fuoco each offering distinctive long linear veins and shading for unique beauty you’re sure to love. With timeless elegance these 12"x24" porcelain tiles, influenced from Palissandro Marble. Add interest and intrigue to your residential or commercial space with the Asturia Collection.

Technical Information

Primary Colors: White, Gray
Material Type: Porcelain
Finish: Matt & Polished
Polished: Hardness / Mohs 5
Matte: Hardness / Mohs 7

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Features At A Glance

- Available in Matte and Polished finish
- Create stunning floors, feature walls, and fireplace walls, while also the perfect choice for facades, facings, and other outdoor feature

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.



Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.