


# MSI

Making Dream Surfaces Attainable

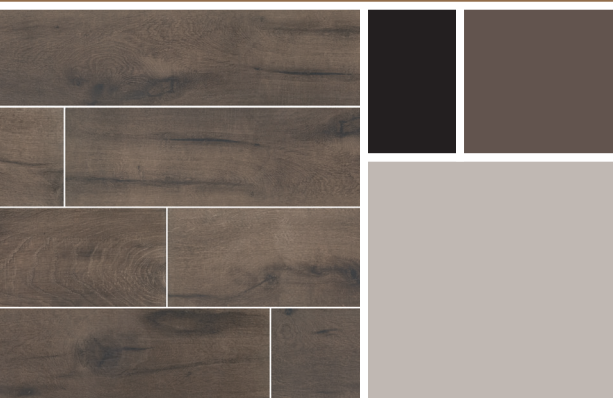

Cottage  
Porcelain Collection

[www.msisurfaces.com](http://www.msisurfaces.com)



Colors



Brown 8"X48"



Smoke 8"X48"



Wenge 8"X48"

Size	Thickness	BROWN	SMOKE	WENGE
8x48	3/8"	NCOTBRO8X48	NCOTSMO8X48	NCOTWEN8X48

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL				III	V4	DCOF - > 0.42 Wet	> 275 lbf	< 0.5%	6
LIGHT COMMERCIAL									
HEAVY COMMERCIAL									

Freeze / Thaw	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	Resistant	Pressed	Glazed

Lived in wood looks! In three stylish colors, these 8"x48" wood look planks offer a subtle vintage appearance with distinctive knots and graining for enduring warmth and character. Choose the Cottage Collection to create low maintenance, budget friendly floors that stand up to high traffic areas without compromise. But don't stop there this modern day tile works well on feature walls, backsplash, and countertops, too. Add interest and detail to your residential or commercial project with the Cottage Collection.

Technical Information

Primary Colors: Brown, Gray  
Material Type: Porcelain  
Finish: Matte  
Polished: Hardness / Mohs 5  
Matte: Hardness / Mohs 7

Features At A Glance

- 8x48 wood look planks
- Incredibly durable and low maintenance
- Matte finish

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Disclaimer:

**Wet Cutting Instruction:** We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

\*No claims accepted after tile installation.

