MSI
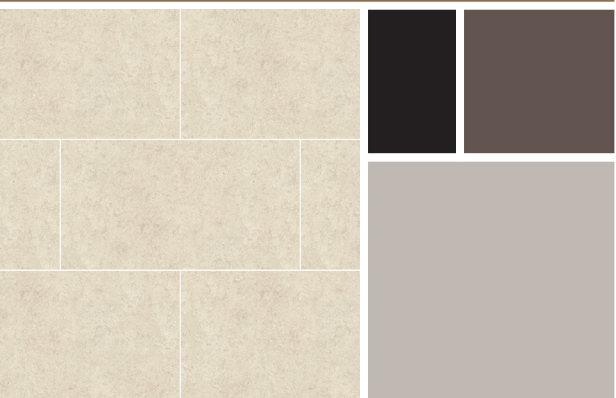
Making Dream Surfaces Attainable

Myra

Porcelain Collection

www.msisurfaces.com

Colors

Myra Ivory 24"x24"

Size	Thickness	MYRA IVORY
24x48	3/8"	NMYRIVO2448
24x24	3/8"	NMYRIVO2424
24X24X2 CM PAVER	3/8"	LPAVNMYRIVO2424
13X24X2 CM POOL COPING	3/8"	LCOPNMYRIVO1324

APPLICATIONS	Flooring	Counters	Wall	PEI Rating	Variation	COF	Breaking Strength	Water Absorption	Hardness
RESIDENTIAL	●	●	●	III	V4	DCOF > 0.42	> 275 lbf	> 0.5%	7
LIGHT COMMERCIAL	●	●	●						
HEAVY COMMERCIAL		●	●						

Freeze / Thaw	Abrasion Resistance	Chemical Resistance	Rectified/ Non-Rectified	Glazed / Non Glazed
Resistant	III	Resistant	Rectified	Glazed

This large format, 24"x24", 24"x48" matte porcelain tile is versatile and can work well for residential or commercial projects. Available in 2 sizes and 1colorway.

Technical Information

Primary Colors: Beige
Material Type: Porcelain
Finish: Matte
Polished: Hardeness / Mohs 5
Matte: Hardness / Mohs 7

Features At A Glance

• The Myra Collection is a matte field tile that features an organic overlay of lemonstone print.

Installation

1/8" Grout Size is recommended on all tile installation. When installing rectangular tiles a less than 33% staggered brick lay is strongly recommended.

Large format tiles: It is mandatory that the mortar coverage on the floor surface and tile be greater than 95% coverage to be fully supported. Voids due to insufficient coverage will result in cracking and tile displacement.

Disclaimer:

Wet Cutting Instruction: We recommend wet cutting or the score & snap method during the installation process. Do not dry cut product using power tools during the installation process. Improper installation techniques could expose installer to harmful silica dust.

Recomendamos el corte en húmedo o el método de marcar y encajar durante el proceso de instalación. No corte en seco el producto utilizando herramientas eléctricas durante el proceso de instalación. Las técnicas de instalación inadecuadas podrían exponer al instalador a polvo de sílice nocivo.

Variation in shade is an inherent attribute of porcelain tile.

To ensure customer satisfaction: Make sure to look over all tiles before installing. Please select tile from same lot: same size, and numerical shade. Intersperse tiles throughout your job from different boxes. Rotate the tiles so there won't be repetitive patterns.

*No claims accepted after tile installation.